

Optolinx FCU-RACK16S

16 Slot Lite Universal Media Converter Center




Features


- ▶ Supports 16 FCU Series Media Converters
- ▶ 19" Rackmount Design, 2U Height
- ▶ LED Indicators for Power Supply
- ▶ 3 Hot-Swappable Cooling Fans
- ▶ Plug-and-Play Operation
- ▶ Small Form Factor Converter Chassis
- ▶ Fixed Internal AC Power
- ▶ 5-Year Warranty




▶ Specifications

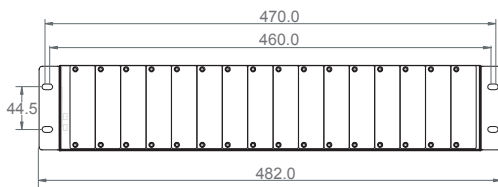


Panel View




Rear View



Side View

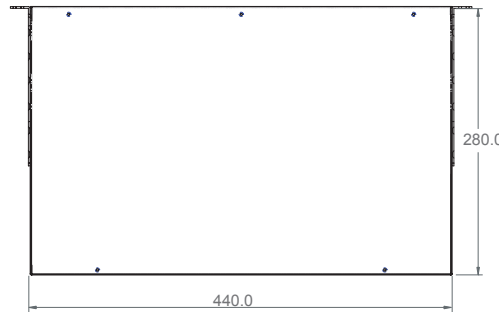

Top View

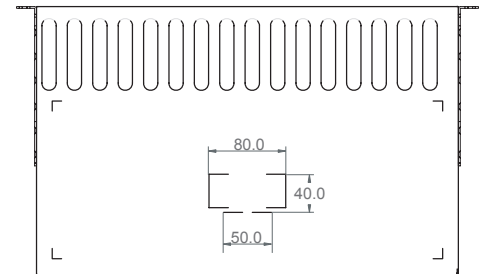

Bottom View

► Specifications

Number of Module Slots

16 Slots

Number of Fans

3 Hot-Swappable Fans

LED

Power

Power

Internal Power
AC 110V or 240V
Power Rated at 100W (Max)
DC 5V

Power Consumption

Empty (Without Modules): 9.5W

Operation Temperature

0° C to 50° C (32° F to 122° F)

Storage Temperature

-20° C to 60° C (-4° F to 140° F)

Operation Humidity

5% to 90% (Non-condensing)

Case Material

Iron / Steel / Plastic

Dimension (W x H x D)

440 x 285 x 88 mm (17.32 x 11.22 x 3.46 inches)

Shipping Weight

6.8 Kg (15 lbs.)

Emission/Safety

FCC Class A, CE

Warranty

5-Year Warranty

► Ordering Information

FCU-RACK16S

16 Slot Lite Universal Media Converter Center

Optional Accessories

CBF-SC01ST-MD

SC to ST Multi-Mode Duplex Fiber Cable (1 Meter)

CBF-SC01SC-MD

SC to SC Multi-Mode Duplex Fiber Cable (1 Meter)

CBF-SC01SC-SS

SC to SC Single-Mode Simplex Fiber Cable (1 Meter)

AD-SCM-STF-M

SC (Male) to ST (Female) Duplex Adapter (Multi-Mode)

AD-SCM-STF-S

SC (Male) to ST (Female) Duplex Adapter (Single-Mode)

Antaira Technologies

Toll-Free: (877) 229-3665
Phone: (714) 671-9000
FAX: (714) 671-9944

e-Mail: info@antaira.com
Website: <http://www.antaira.com>


www.antaira.com